					4 mm Hex Wrench	
Tools:					5 mm Hex Wrench	
					13mm Wrench	
Bed Hardware:	1		M8 x 20mm Button Head Screw (6)	Bed Components:		Headboard
	2		M6 x Joint Connector Screw (6)			Footboard
				Be		Pendant Holder
Cart Hardware:	А		M8 x 45mm Button Head Screw (4)	Cart Components:		Foot End Cart
	В		M8 Flat Washer (2)			Head End Cart (Male)
	D		M8 Lock Nut (2)			Head End Cart (Female)




		Always Follow Instructions		
	<u></u>	Do Not Discard any Hardware		
		Always disconnect AC power before servicing Bed		
	CAUTION	BED IS HEAVY!		
WARNINGS:	1	2 People Required		
R	TOP HEAVY	Improper Handling may result in serious injury		
WA		Always disconnect AC power before servicing Bed		
		Refer to owner's manual where appropriate		
		Contact SonderCare if further assistance is required		



Bed may be delivered in the horizontal OR vertical positions Cut and discard all stretch wrap

Place Head/Footboard box aside for later use

Position bed in a clear open space – if bed is in the vertical position, ensure no overhead obstructions exist

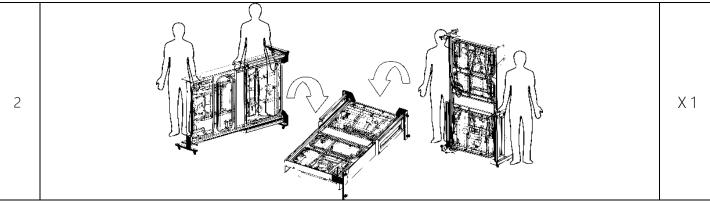

Using two persons, lower bed from either the horizontal or vertical transport positions to the normal use position

Remove all additional packaging from bed (ALL stretch wrap and bubble wrap)

NOTE:

During lowering procedure, support bed from both sides to ensure bed DOES NOT move unintentionally. Failure to do so may result in SERIOUS INJURY.







X2

While bed is in the normal use position,
Remove both M8 x 35mm Button Head Screws from the head end cart
Remove Head End Cart (Female) and set aside





X 1

Connect bed to an AC power source

While standing on the lower cross member of the Head End Cart (Male), raise bed to allow for removal to the Cart







X 1

Remove Head End Cart (Male)

Attach Head End Cart (Female) to Head End Cart (Male), using removed hardware and store for later use

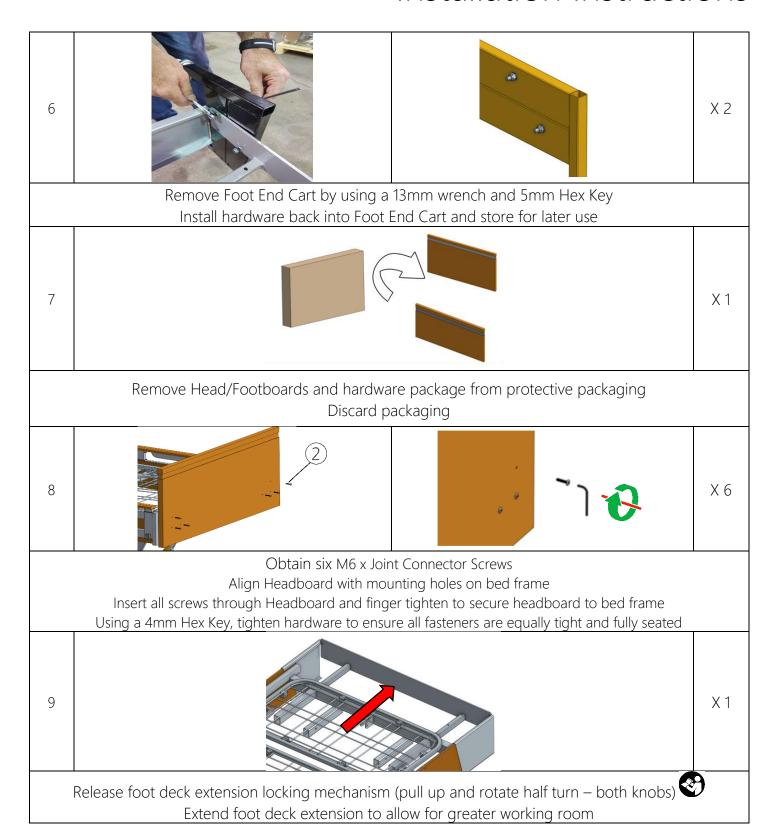



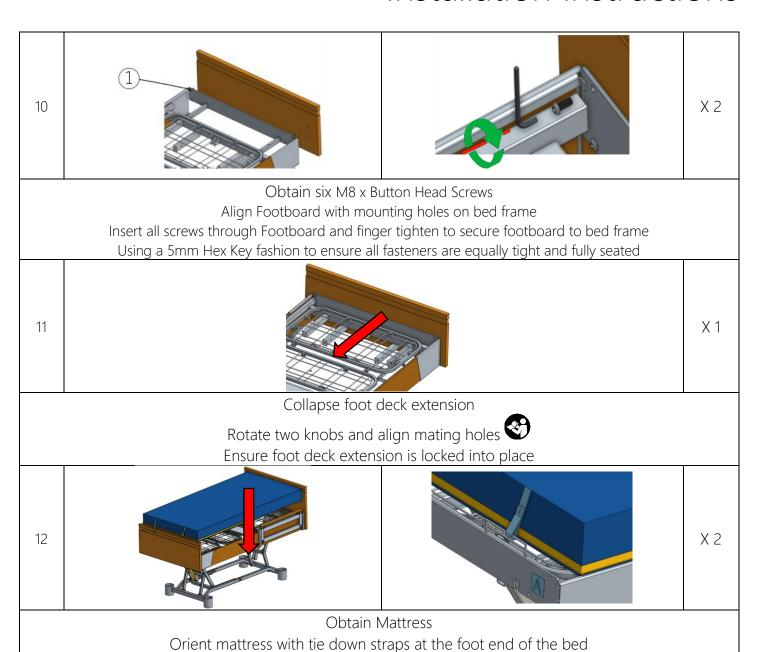

Loop the velcro strap around foot end mattress keeper and back onto itself (Footboard removed for clarity)

